T5 Fl & LED Tube
Reflector Luminaires



Technical Drawing



Light Distribution Curve

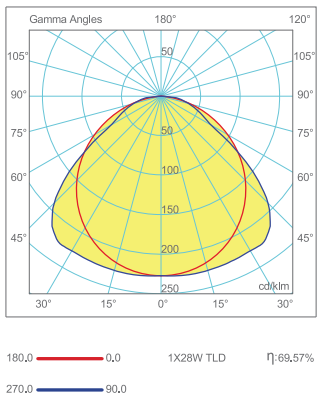

Mechanical Specifications

+ With 0,50 mm thick metal frame with electrostatic powder coating. Easy installation thanks to UV reinforced polymer locking system

Optical Specifications

+ Electrostatic powder coated non- yellowing metallic reflector providing optimum diffusion.
+ With "anodized aluminium reflector" maintaining its optical properties throughout lifetime of the luminaire without yellowing or discoloration.
+ Luminaires for fluorescent lamps T16.
+ Connection for operation with electronic ballast dimmable (lamps T16).
+ Connection for emergency lighting system (lamps T16).

Technical & Electrical Specifications

+ Connection for operation on 220V-50/60Hz with electronic ballast (lamps T16).

Options

+ Emergency lighting unit application up to 3 hours.
+ LED Tube Lamp applications

Fields of Application



Standards of Application



Product Details

Code Order (FL)	Code Oder (LED Tube)	Type	Power (W)	Lamp Type	Power Factor	Dimensions	Base	Pcs/Pack	Ballast Type
CST 040505	CST 040117	Aluminium	1x14/9	TL-D	>0.95	575x97	G5	10	Electronic
CST 040506	CST 040118	Aluminium	2x14/9	TL-D	>0.95	575x107	G5	10	Electronic
CST 040507	CST 040119	Aluminium	1x28/18	TL-D	>0.95	1175x97	G5	10	Electronic
CST 040508	CST 040120	Aluminium	2x28/18	TL-D	>0.95	1175x107	G5	10	Electronic
CST 040509	CST 040121	Metallic	1x14/9	TL-D	>0.95	575x97	G5	10	Electronic
CST 040510	CST 040122	Metallic	2x14/9	TL-D	>0.95	575x107	G5	10	Electronic
CST 040511	CST 040123	Metallic	1x28/18	TL-D	>0.95	1175x97	G5	10	Electronic
CST 040512	CST 040124	Metallic	2x28/18	TL-D	>0.95	1175x107	G5	10	Electronic