



T8 - T5 - LED Tube Clean Room Luminaires



Technical Drawing

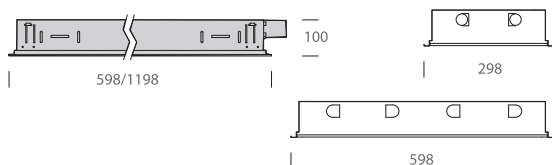


Light Distribution Curve

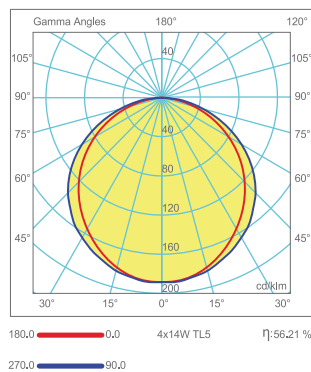

Fields of Application



Standards of Application



Product Details

Order Code (FL-T5,T8)	Order Code (T5,T8 - LED Tube)	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Base	Pcs/Pack	Ballast Type Options
CST 070805	CST 070109	2x18/12	TL-D	>0.95	598x298x100	G13	2	Magnetic Electronic
CST 070806	CST 070110	3x18/12	TL-D	>0.95	598x598x100	G13	2	Magnetic Electronic
CST 070807	CST 070111	2x36/24	TL-D	>0.95	1198x298x100	G13	2	Magnetic Electronic
CST 070808	CST 070112	3x36/24	TL-D	>0.95	1198x598x100	G13	2	Magnetic Electronic
CST 070505	CST 070113	2x14/9	TL-D	>0.95	598x298x100	G5	2	Electronic
CST 070506	CST 070114	3x14/9	TL-D	>0.95	598x598x100	G5	2	Electronic
CST 070507	CST 070115	2x28/18	TL-D	>0.95	1198x298x100	G5	2	Electronic
CST 070508	CST 070116	3x28/18	TL-D	>0.95	1198x598x100	G5	2	Electronic

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ High transmission PMMA optical cover with homogenous luminous distribution, non-yellowing and non-discolouring throughout lifetime of the luminaire. Anti-glare, highly reflective lamellae.

+ Uses special design, special rubber installed in-between lamp and transparent shade to acquire sealing effect, buckle spring design, and easy mounting and maintenance.

+ Undergoes rust removal, grease removal, and rustproof treatment, and full spray-coated treatment, no rust will appear for normal indoor use.

Technical & Electrical Specifications

- Luminaires for fluorescent & LED lamps T16 (T5), T26 (T8)
- Connection for operation on 220V-50/60Hz with conventional ballast and power factor correction capacitor (lamps T26).
- Connection for operation on 220V-50/60Hz with electronic ballast (lamps T26, T16).
- Connection for operation with magnetic ballast or electronic ballast dimmable (lamps T26, T16).

Options

- Connection for emergency lighting system (lamps T26, T16).
- Ivory white organic & Rhombic Cover

